


# Gravity Grease Interceptor GreaseBase -1 (S 1:15)

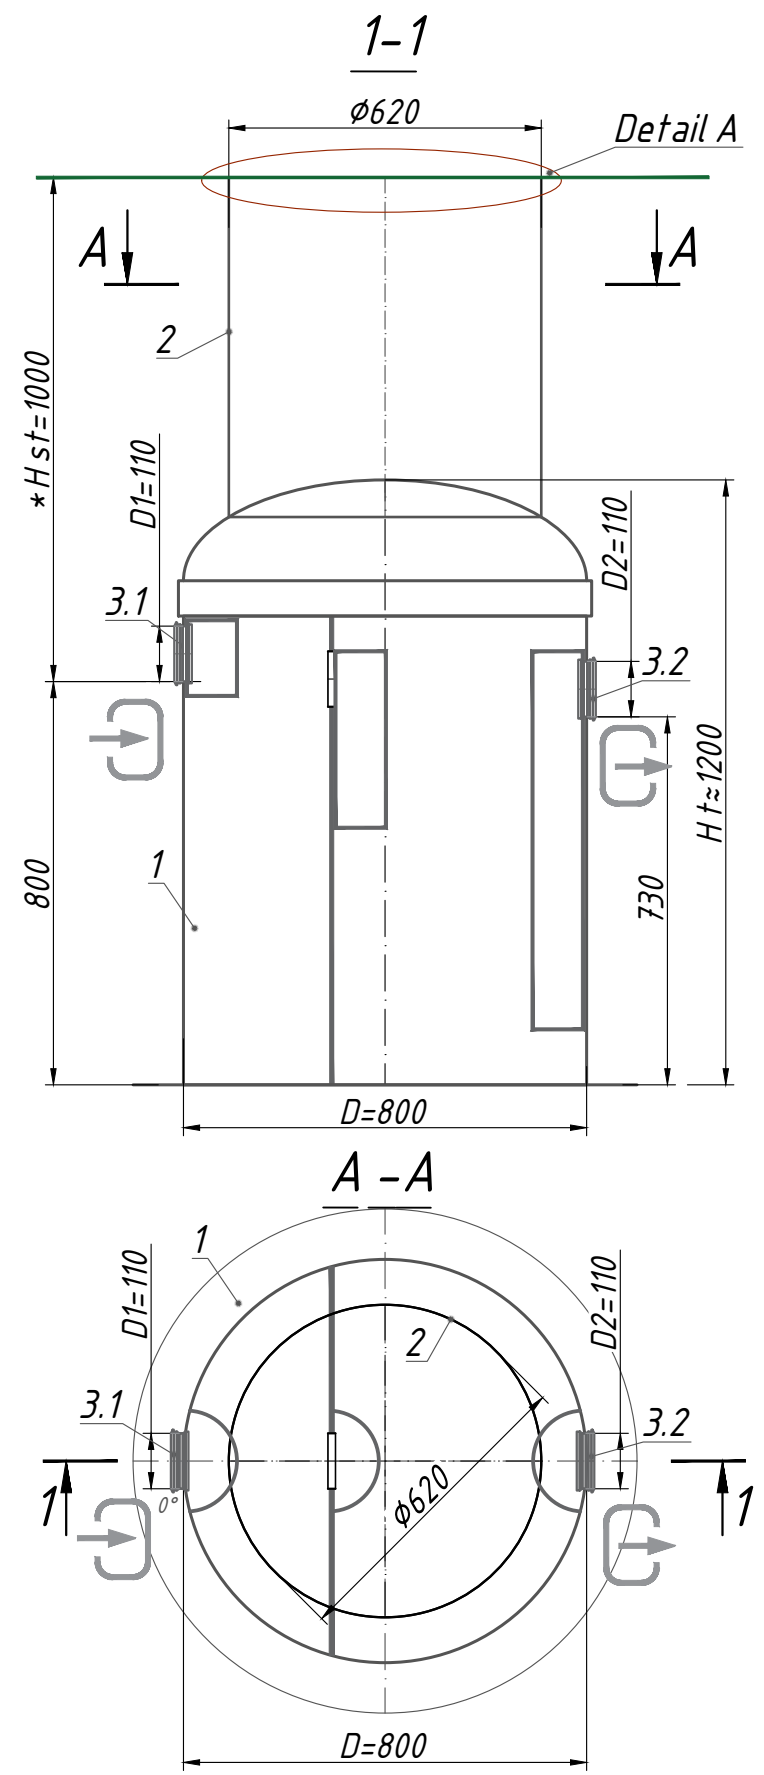

## Specification of materials and equipment. Standard equipment \*\* (Tabl. 1)


Pos.	Identification	Name	Q-ty	Mass pc.,kg	Note
1	Vodaland	Gravity Grease Interceptor Vodaland GreaseBase -1 with sludge trap, disch. 1l/s, fiberglass, D= 800, Ht≈ 1200 mm	1	60	compl.
2		Inspection manhole Ø620	1		compl.
3.1,3.2	D1-Inlet / D2-Outlet	Rubber seal for connection Ø 110	2		compl.
		Volume of light liquids	130		l
		Volume of sludge trap	105		l

\*\*The product is shipped according to Standard Equipment ( Tabl. 1), unless otherwise specified in the Additional Information


### Gravity Grease Interceptor



### Standard equipment

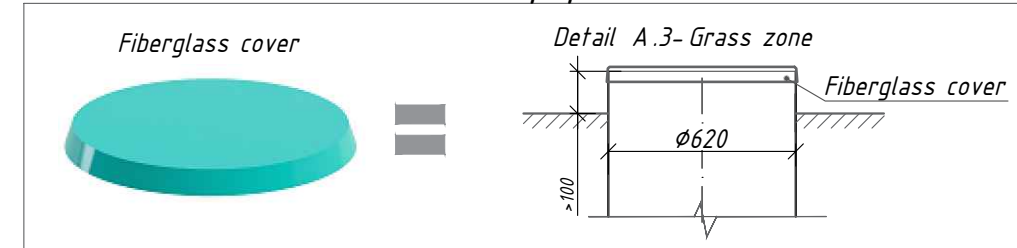

### Additional equipment

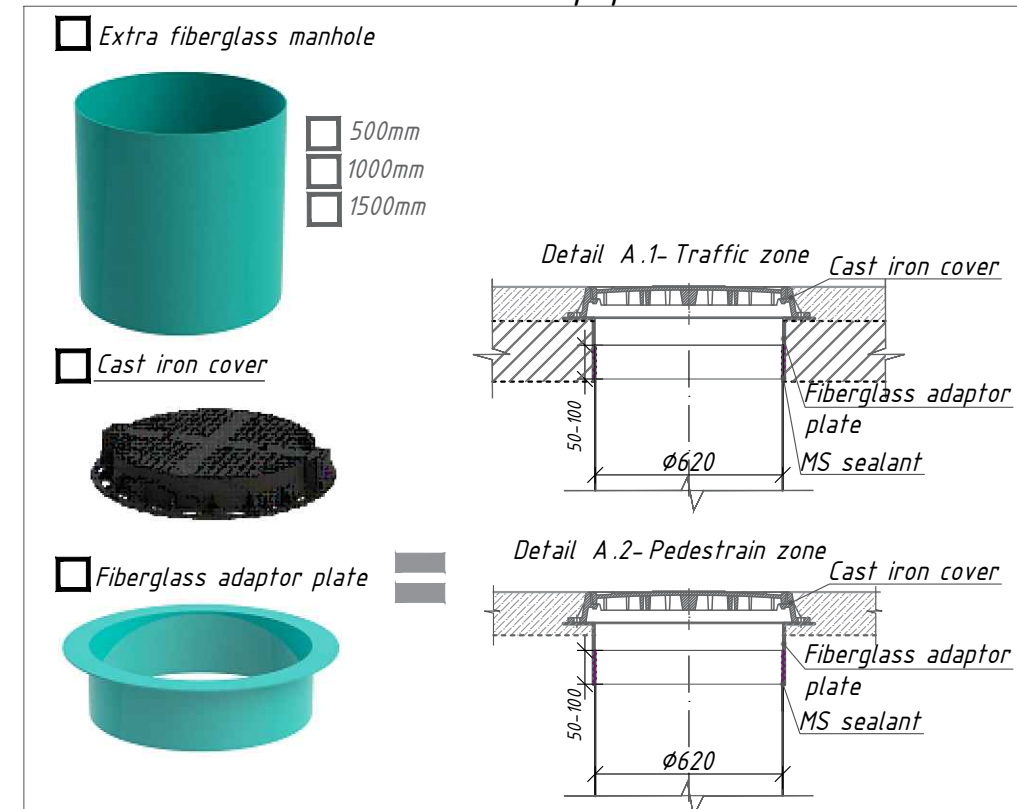

Note:

- \*H-depth of the inlet connection (in standard equipment H up to 1000 mm. H take a multiple of 50mm.
- \*\*The product is shipped according to Standard Equipment ( Tabl. 1), unless otherwise specified in the Additional Information. The complete set of the product is agreed with the manager.
- \*\*\*The manufacturer reserves the right to make design and schematic changes that do not impair the characteristics of the product as a whole. Permissible deviation during production of products is 1-3%.

Additional Information:

Gravity Grease Interceptor GreaseBase -1		VODALAND ESPAÑA SL Calle del Proyecto N6,nave 17, 46393 Loriguilla (Masia del Conde) +34 651 030 722
Factory ID:	GB- 1	
manufactured by Ukraine, Cherkasy city, 18028		distributed by