


Oil and water Separator OilBase100 -2 (S 1:16)

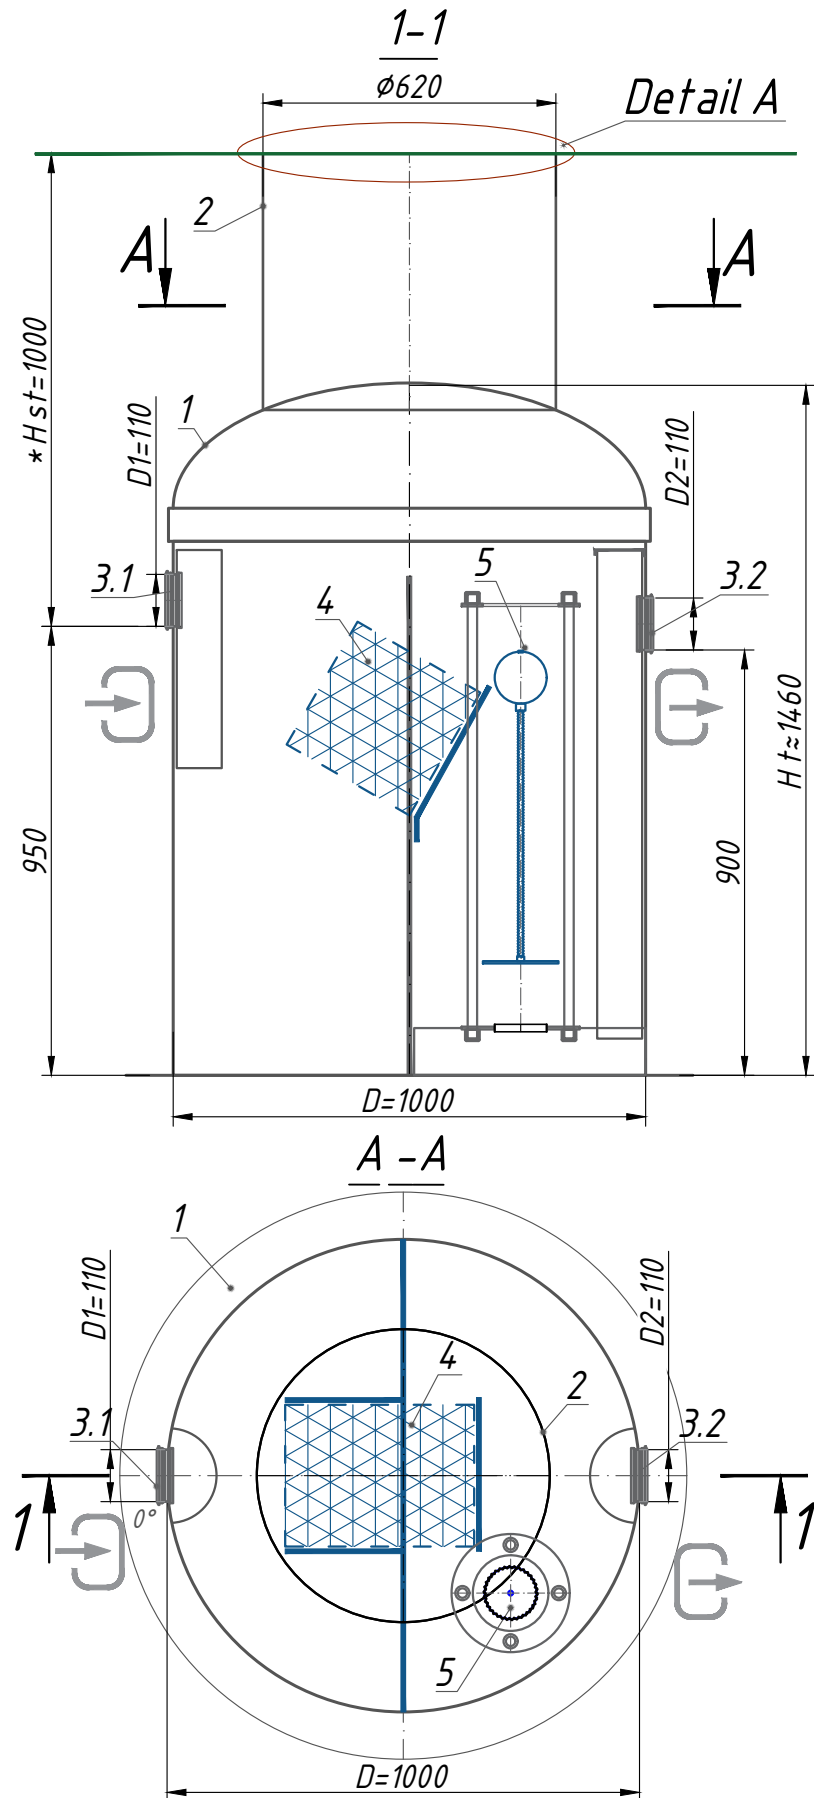


Specification of materials and equipment. Standard equipment ** (Tabl. 1)


Pos.	Identification	Name	Q-ty	Mass pc.,kg	Note
1	Vodaland	Oil and water Separator Vodaland OilBase100 -2, disch. 2 l/s, (0 l/s -ByPass) fiberglass, D= 1000 , H t≈ 1460 mm	1	92	compl.
2		Inspection manhole $\phi 620$	1		compl.
3.1,3.2	D1-Inlet / D2-Outlet	Rubber seal for connection $\phi 110$	2		compl.
4		Coalescent block	1		compl.
5		Automatic locking device D110	1		compl.
		Volume of light liquids	100		l
		Volume of sludge trap	200		l

**The product is shipped according to Standard Equipment (Tabl. 1), unless otherwise specified in the Additional Information


Oil and water Separator

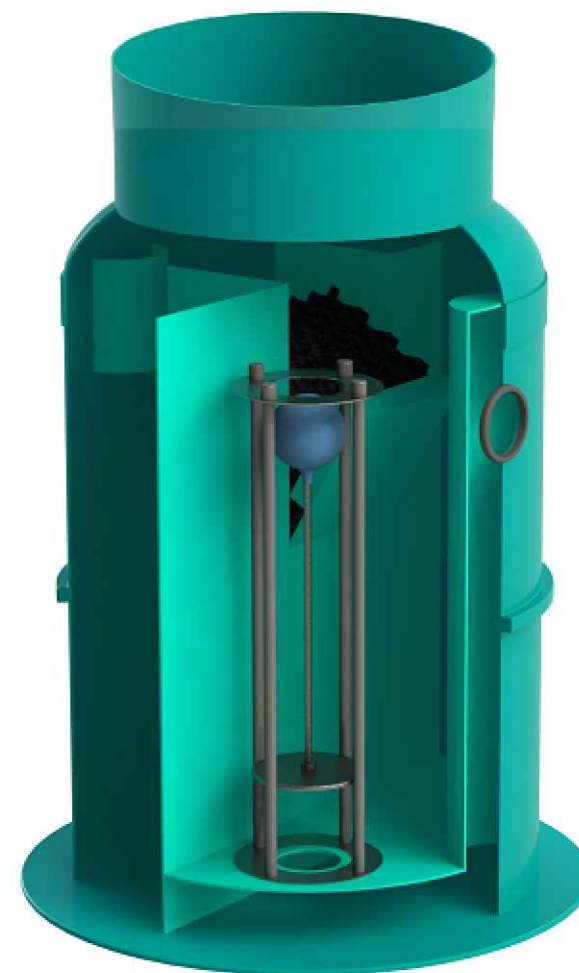

Standard equipment

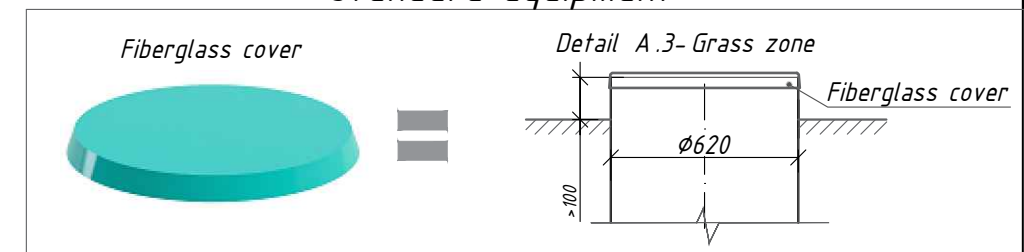

Additional equipment

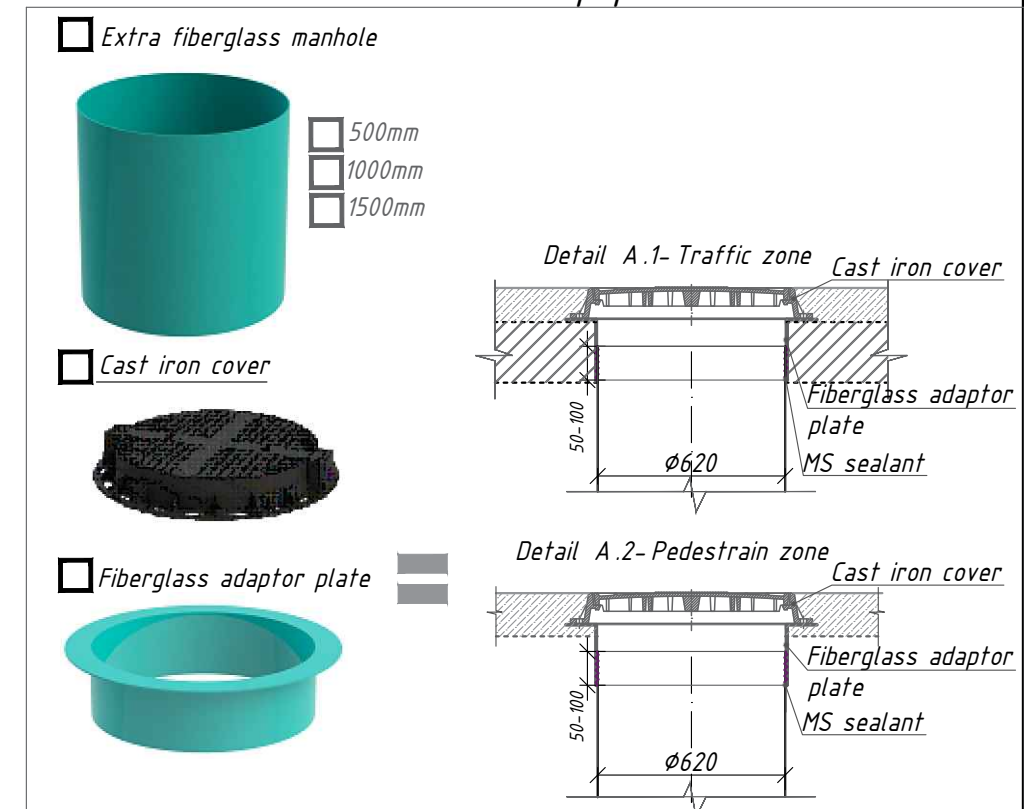

Note:

*H-depth of the inlet connection (in standard equipment H up to 1000 mm. H take a multiple of 50mm.

**The product is shipped according to Standard Equipment (Tabl. 1), unless otherwise specified in the Additional Information. The complete set of the product is agreed with the manager.

***The manufacturer reserves the right to make design and schematic changes that do not impair the characteristics of the product as a whole.

Permissible deviation during production of products is 1-3%.

Additional Information:

Oil and water Separator
OilBase100 -2

Factory ID: OB1-2

VODALAND ESPAÑA SL
Calle del Proyecto N6,nave 17,
46393 Loriguilla (Masia del Conde)
+34 651 030 722

